





PATHWAY LED M 9252



### PATHWAY FOUNDATION KIT

steel


8795



### PATHWAY LED S

painting steel, painting aluminum


9420

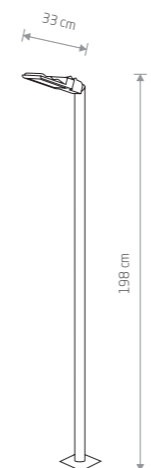

### PATHWAY LED M

painting steel, painting aluminum

9252

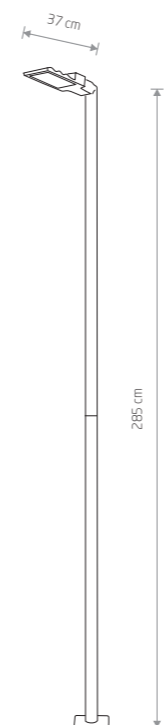

### PATHWAY LED L

painting steel, painting aluminum

9125



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9420	24W LED	3000K	2200 lm	100°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,9	IP44	30000h
9252	24W LED	3000K	2200 lm	100°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,9	IP44	30000h
9125	36W LED	3000K	3600 lm	100°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,9	IP44	30000h